

E.ONYX POWER

FICHE PRODUIT PRODUCT SPECIFICATION


**NOWATT
LIGHTING**




Descriptif - Product specification

Appareil d'alimentation solaire autonome pour appareil d'éclairage
Cordon de connexion 8 fils IP 67
Connecté Bluetooth
Application disponible sur Play Store
Cellules solaires Sunpower Back Contact
Batterie LiFePo4 20 Ah 3,2 V > 50 000 h
Bâti polyuréthane moulé finition peinture thermolaquée polyester
Couleur standard graphite
2 inserts M6 pour fixation du dispositif d'accroche
Dimensions : H x L x l : 305 x170x 36 mm
Poids : 3 Kg
Classe III IP 67 IK 07 CE
Montage en série avec prise USB étanche

*Solar autonomous powering fixture for lighting fixture
8-wires IP 67 connection cord
Bluetooth connected
App available on Play Store
Sunpower Back Contact solar cells
Battery: LiFePo4 20 Ah – 3,2 V > 50 000 h
Built in moulded polyurethane powder coated polyester finish
Standard color graphite
2 M6 inserts for attaching the mounting device
Dimensions : H x W x l: 305 x170x 36 mm
Weight: 3 Kg
Protection class III Protection degree IP67 IK07 CE
All Onyx product are equipped with waterproof USB socket*

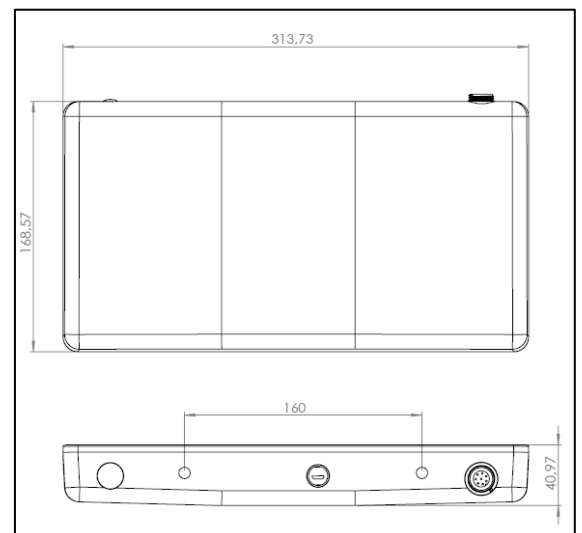


Application à télécharger sur Play Store / Application to download on Play Store

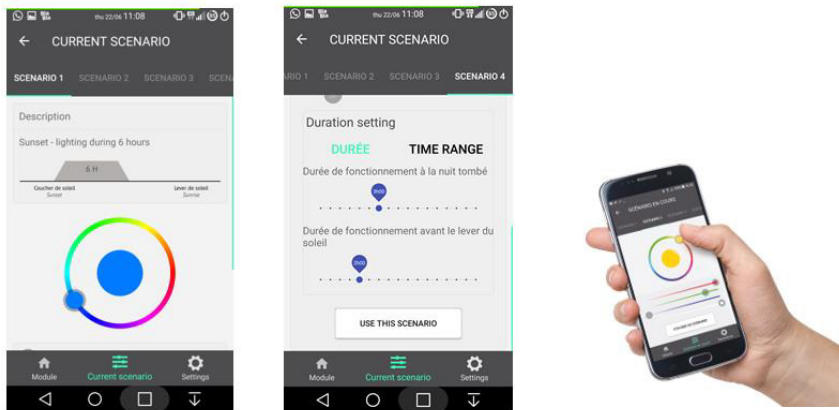

Rappel des scénarios de base - Reminder of basic scenarios


SCENARIO 1

Coucher de soleil – éclairage pendant 6h
Sunset - lighting during 6 hours




SCENARIO 2

Coucher de soleil – éclairage pendant 4h
Éclairage 2h avant le lever du soleil
Sunset - lighting during 4 hours
Lighting 2 hours before sunrise

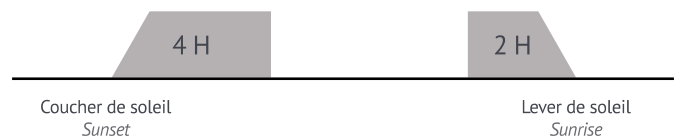

SCENARIO 3

Coucher de soleil au lever de soleil -
détection de mouvement
(temporisation après la détection : 2 min)
Sunset to sunrise - motion detector
(delay after detection: 2 min)

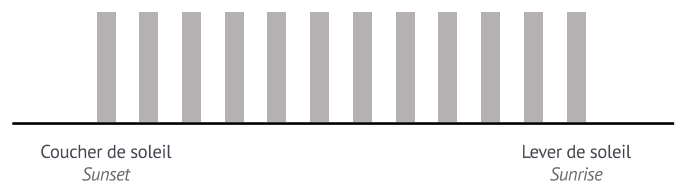

SCENARIO 4

Scénario sur demande
Scenario on demand

Gamme de Couleurs – Range of Colors



Graphite
Interpon Futura Noir 2100 Sablé
Code YW359F


Autres couleurs sur demande
Other colors on demand

Dispositifs de fixation – Mounting devices

FIXATION MURALE WALL BRACKET

Console murale en acier traité anti-
oxydation thermo-laqué polyester noir
(Interpon Futura Noir 2100 Sablé
Code YW359R) Longueur 50 ou 200
mm


*Steel treated with antioxidation wall bracket, black
powder coated polyester finish. (Interpon Futura Black 2100
Sand-blasted Code YW359R)
Length 50 or 200 m*

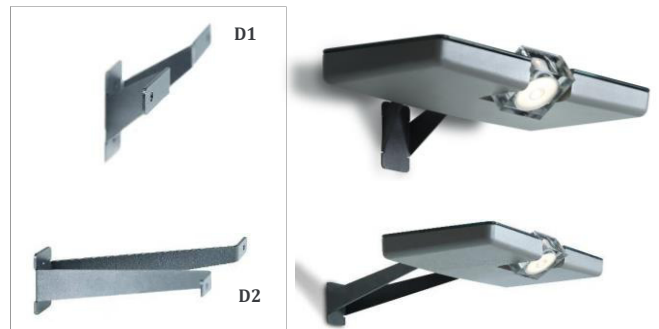

FIXATION LYRE MOUNTING LYRE

Fixation Lyre en acier traité anti-oxydation thermo-laqué polyester
noir

*Steel treated with anti-oxidation, black powder coated polyester
finish.*



FIXATION TOTEM TOP TOTEM FASTENING

Fixation top totem en acier traité anti-oxydation thermo-
laqué polyester noir

*Steel treated with anti-oxidation, black powder coated
polyester finish.*



FIXATION COLLIERS MOUNTING CLAMS

Fixation colliers - support tuyauterie avec protection antivibratoire
A visser - Inox 316
Couleur et diamètre en fonction du projet

*Mounting clamps - tubes supports with antivibration protection
To screw – Inox 316
Color and diameter depending of the project*

